




Planeo 4022

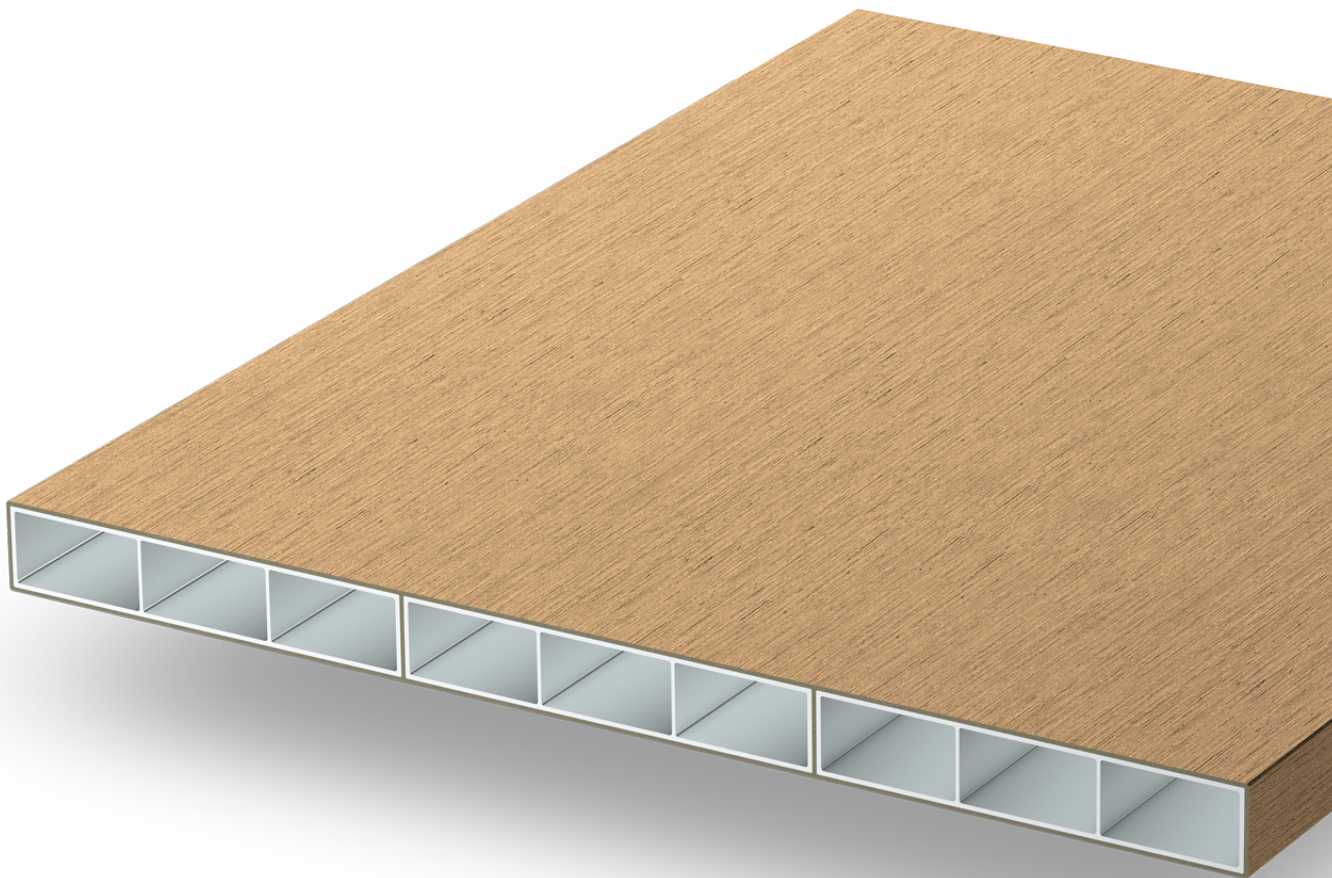

17 1/4 in x 1 1/4 in 435 mm x 30 mm

Technical datasheet



Planeo 4022

WHS: Wood hybrid system

Geolam®

Architectural Eco-Technology



Section tolerances in mm: +0.5 / -2.0 mm or +1/64 to -5/64 in

The outer wpc layer is sanded for aesthetic reasons and consists of peaks and valleys; the dimension provided is average thickness

Fire rating:

On request:

ASTM E-84 class A

Euroclass NF EN 135011 : B, s3-d0

Euroclass NF EN 135011 : A2, s3-d0

NFP 92 -507 : M2 or M1

Surfaces finish: Sanded

Other surface textures available on request. Sanding finish and/or shading may vary between runs. WPC thickness may vary in compliance with flame test requirements.

Profiles fastening and installation:

Planeo boards cannot be cut within the bolts at either board end. Refer to our website www.geolam.com
Technical information may change without warning.

Standard length: 9 ft 10 in | 3.0 m

On order any length from: 7 ft to 27 ft | 2.15 m to 8.25 m

Weight: 4.23 lb/ft | 6.30 kg/m

Secondary moment Ix (cm⁴): 6.30 kg/m

Secondary moment Iy (cm⁴): 22.76

Section modulus Z+x (cm³): 2678.23

Section modulus Z-x (cm³): 16.86

Section modulus Z+y (cm³): 16.86

Section modulus Z-y (cm³): 123.99

Core in anodized aluminum alloy: A6063S-T5 Serie 6000

Coefficient of Thermal Expansion (20-100°C):

23.4 µm/m/°C

Modulus of Elasticity: 68.9 GPa

Max Tensile Strength: 186 Mpa

Carbon Footprint:

603.1

Norms and certificates:

WPC : 1.54 kg CO₂/Kg

Profile : 9.005 kg CO₂/Kg



Teak



Limba



Rosewood



Wenge



Bilinga




Carbon



Ivory



Any color on request

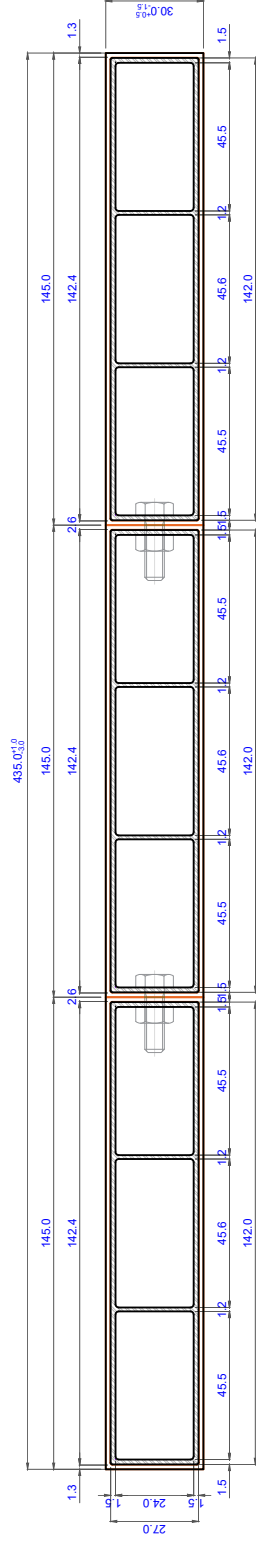

Technical specifications, dimensions in mm			Wood hybrid system WHS		Type 1.0
Weight (kg/ml)	6.19		Planeo 4022		
Cross section, secondary moment Ix (cm ⁴)	22.76				
Cross section, secondary moment Iy (cm ⁴)	2678.23				
			Cross section coefficient Z+x (cm ³)	16.86	
			Cross section coefficient Z-x (cm ³)	16.86	
			Cross section coefficient Z+y (cm ³)	123.99	
			Cross section coefficient Z-y (cm ³)	123.99	