




Planeo 4150

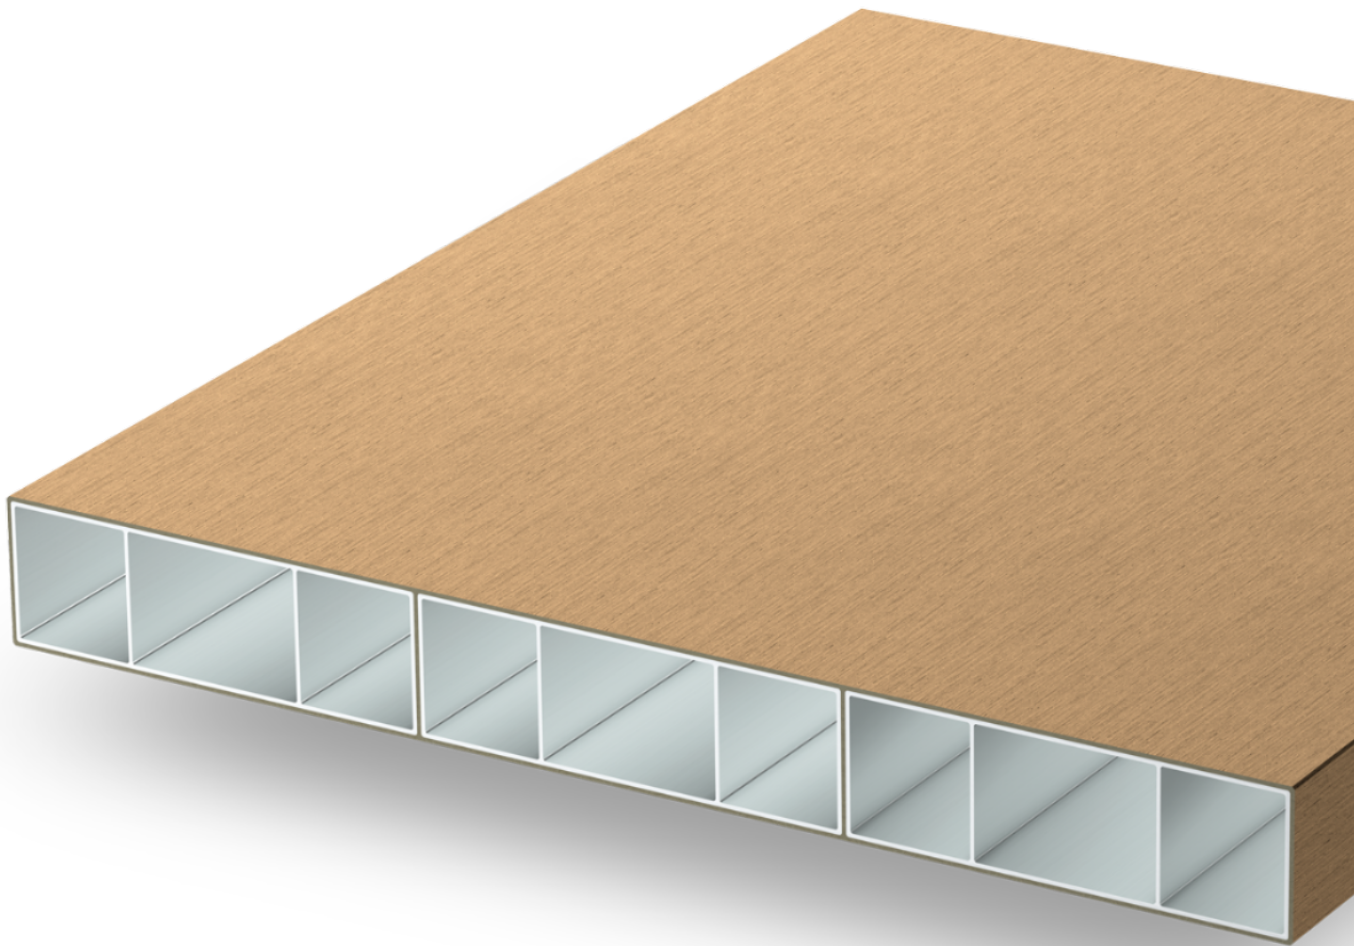

17 ³/₄ in x 2 in or 450 mm x 50 mm

Technical datasheet



Planeo 4150

WHS: Wood hybrid system

Geolam[®]

Architectural Eco-Technology



Section tolerances in mm: +0.5 / -2.0 mm or + 1/64 to - 5/64 in

The outer wpc layer is sanded for aesthetic reasons and consists of peaks and valleys; the dimension provided is average thickness

Fire rating:

On request:

ASTM E-84 class A

Euroclass NF EN 135011 : B, s3-d0

Euroclass NF EN 135011 : A2, s3-d0

NFP 92 -507 : M2 or M1

Surfaces finish: Sanded

Other surface textures available on request. Sanding finish and/or shading may vary between runs. WPC thickness may vary in compliance with flame test requirements.

Profiles fastening and installation:

Planeo boards cannot be cut within the bolts at either board end. Refer to our website www.geolam.com
Technical information may change without warning.

Standard length: 9 ft 10 in | 3.0 m

On order any length from: 7 ft to 27 ft | 2.15 m to 8.25 m

Weight: 4.84 lb/ft | 7.20 kg/m

Secondary moment Ix (cm⁴): 7.20 kg/m

Secondary moment Iy (cm⁴): 76.1

Section modulus Z+x (cm³): 3386.37

Section modulus Z-x (cm³): 32.38

Section modulus Z+y (cm³): 32.38

Section modulus Z-y (cm³): 151.51

Core in anodized aluminum alloy: A6063S-T5 Serie 6000

Coefficient of Thermal Expansion (20-100°C):
23.4 µm/m/°C

Modulus of Elasticity: 68.9 GPa

Max Tensile Strength: 186 Mpa

Norms and certificates:

WPC : 1.54 kg CO₂/Kg

Profile : 9.005 kg CO₂/Kg



Teak



Limba



Rosewood



Wenge



Bilanga




Carbon



Ivory



Any color on request

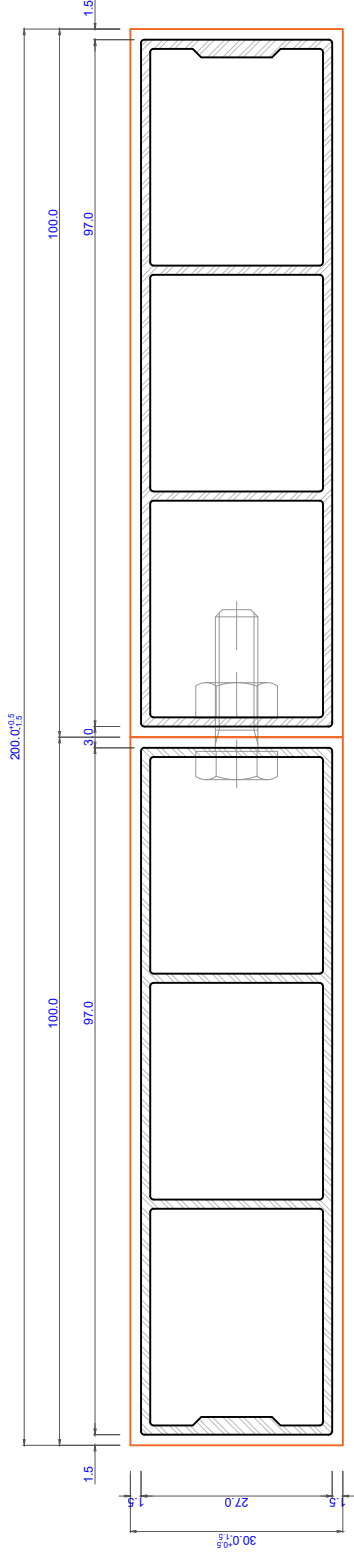

Technical specifications, dimensions in mm		Wood hybrid system WHS		Type 1.0
Weight (lbs/ft)	-	Planeo 4157		
Cross section, secondary moment Ix (cm ⁴)	9.63	Cross section coefficient Z-x (cm ³)	7.14	7.14
Cross section, secondary moment Iy (cm ⁴)	286.70	Cross section coefficient Z+y (cm ³)	29.11	29.11
		Cross section coefficient Z-y (cm ³)	29.11	29.11