




Soleo 6042

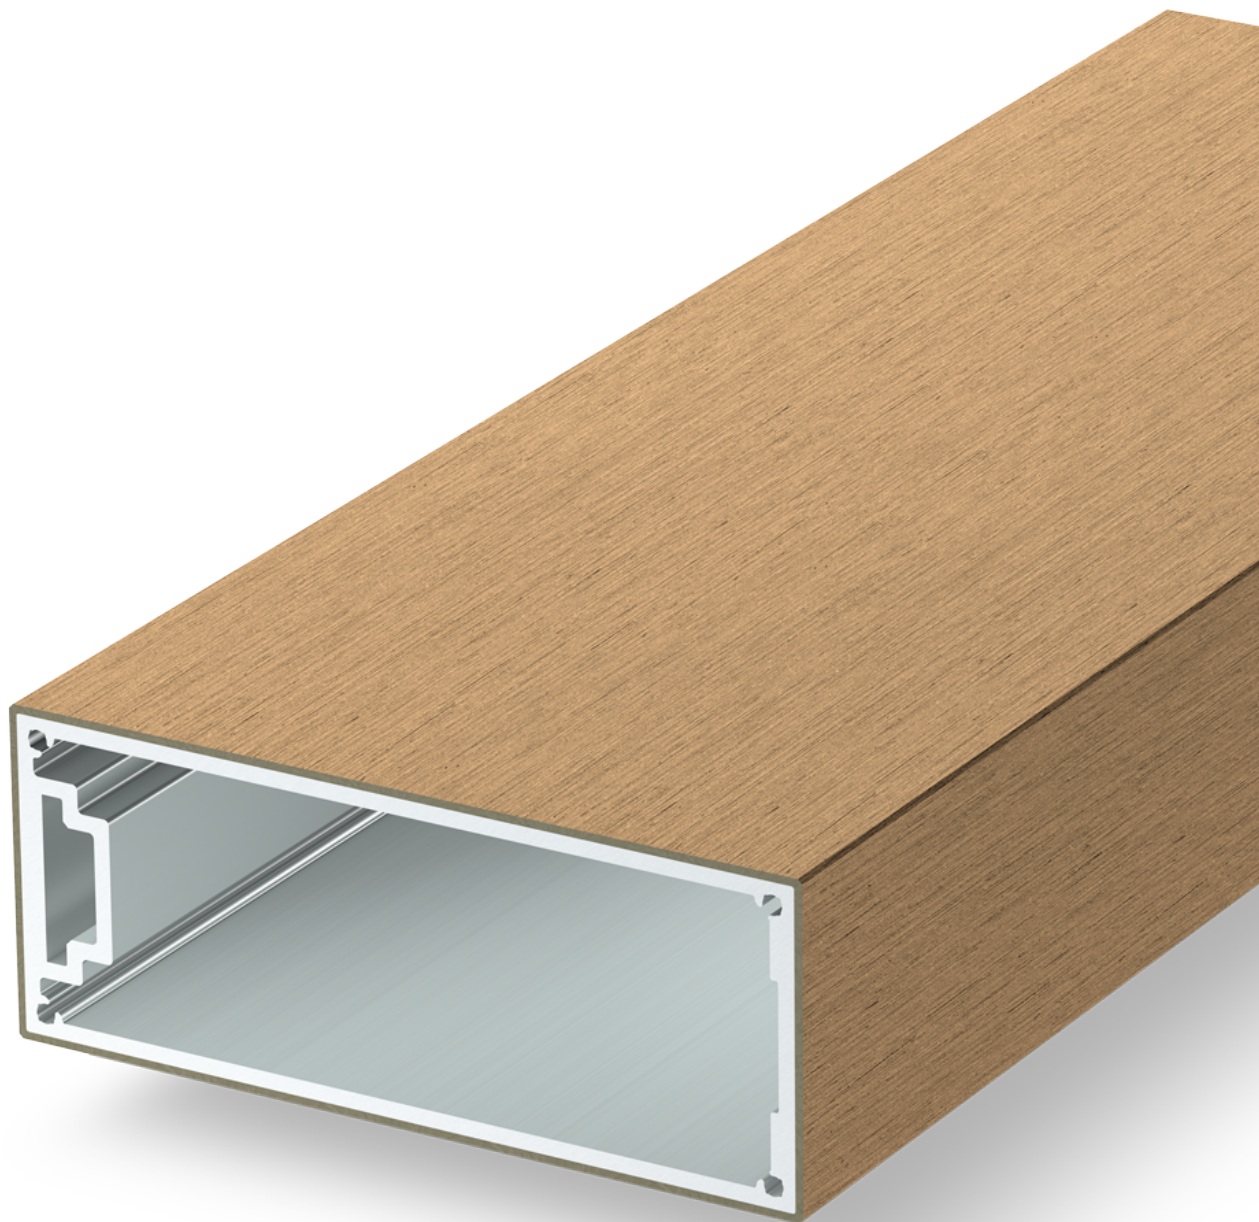

6 in x 2 ¹/₄ in or 150 mm x 60 mm

Technical datasheet




Soleo 6042

WHS: Wood hybrid system

Geolam[®]

Architectural Eco-Technology

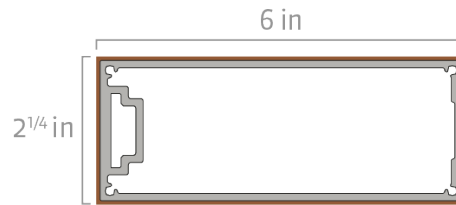

Section tolerances in mm: +0.5 / -2.0 mm or +1/64 to -5/64 in

The outer wpc layer is sanded for aesthetic reasons and consists of peaks and valleys; the dimension provided is average thickness

Fire rating:

On request:

ASTM E-84 class A

Euroclass NF EN 135011 : B, s3-d0

Euroclass NF EN 135011 : A2, s3-d0

NFP 92 -507 : M2 or M1

Surfaces finish: Sanded

Other surface textures available on request. Sanding finish and/or shading may vary between runs. WPC thickness may vary in compliance with flame test requirements.

Profiles fastening and installation:

Check our website www.geolam.com

Technical information may change without warning.

Standard length: 9 ft 10 in | 3.0 m

On order any length from: 7 ft to 19 ft 8 in | 2.15 m to 6 m

Weight: 3.06 lb/ft | 4.56 kg/m

Secondary moment Ix (cm⁴): 4.56 kg/m

Secondary moment Iy (cm⁴): 74.77

Section modulus Z+x (cm³): 412.05

Section modulus Z-x (cm³): 26.23

Section modulus Z+y (cm³): 26.23

Section modulus Z-y (cm³): 50.4

Core in anodized aluminum alloy: A6063S-T5 Serie 6000

Coefficient of Thermal Expansion (20-100°C):

23.4 µm/m/°C

Modulus of Elasticity: 68.9 GPa

Max Tensile Strength: 186 Mpa

Carbon Footprint:

1442.7

Norms and certificates:

WPC : 1.54 kg CO₂ /Kg

Profile : 9.005 kg CO₂ /Kg



Teak



Limba



Rosewood



Wenge



Bilinga



Carbon



Ivory



Any color on request

Planeo 4084 ()


Secondary moment I_x (cm⁴): : 8.53 kg/m

Secondary moment I_y (cm⁴): : 148.77

Weight: : 5.73 lb/ft | 8.53 kg/m

Section modulus $Z+x$ (cm³): : 2314.97

Section modulus $Z+y$ (cm³): : 52.33

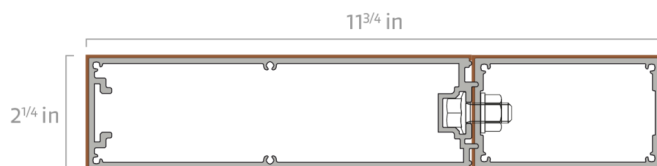

Planeo 4085 ()


Secondary moment I_x (cm⁴): : 9.94 kg/m

Secondary moment I_y (cm⁴): : 171.7

Weight: : 6.68 lb/ft | 9.94 kg/m

Section modulus $Z+x$ (cm³): : 3390.1

Section modulus $Z+y$ (cm³): : 60.14

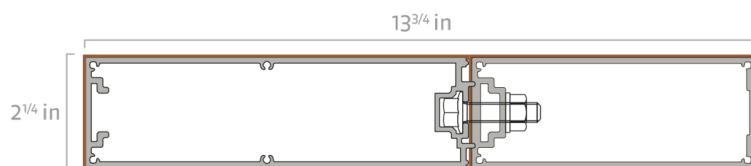

Planeo 4086 ()


Secondary moment I_x (cm⁴): : 10.76 kg/m

Secondary moment I_y (cm⁴): : 194.56

Weight: : 7.19 lb/ft | 10.76 kg/m

Section modulus $Z+x$ (cm³): : 4923.07

Section modulus $Z+y$ (cm³): : 68.26

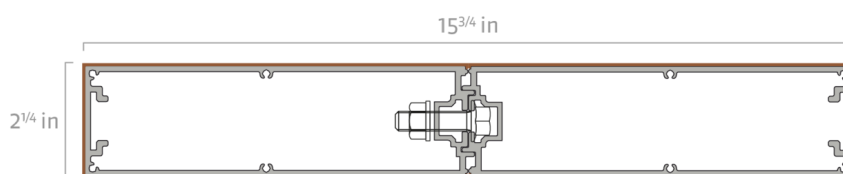


Planeo 4087 ()

 Secondary moment I_x (cm⁴): : 11.25 kg/m

 Secondary moment I_y (cm⁴): : 214.44

Weight: : 7.53 lb/ft | 11.25 kg/m

 Section modulus $Z+x$ (cm³): : 6585.27

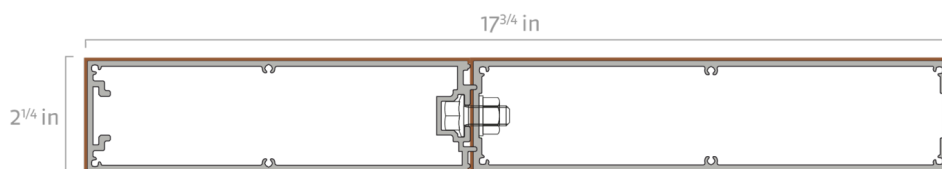
 Section modulus $Z+y$ (cm³): : 75.39

Planeo 4088 ()

 Secondary moment I_x (cm⁴): : 13.91 kg/m

 Secondary moment I_y (cm⁴): : 245.35

Weight: : 9.34 lb/ft | 13.91 kg/m

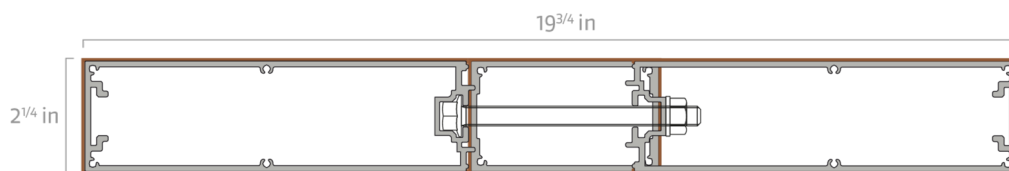 Section modulus $Z+x$ (cm³): : 9217.43


 Section modulus $Z+y$ (cm³): : 86.09

Planeo 4089 ()

 Secondary moment I_x (cm⁴): : 15.31 kg/m

 Secondary moment I_y (cm⁴): : 267.7

Weight: : 10.28 lb/ft | 15.31 kg/m

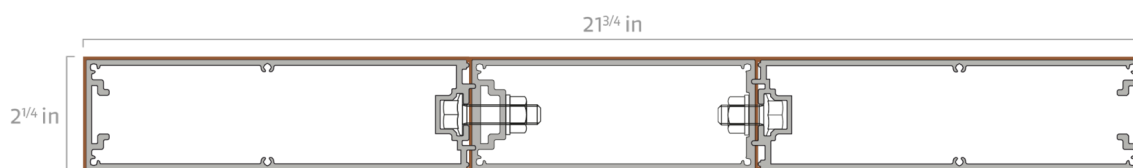 Section modulus $Z+x$ (cm³): : 12209.39

 Section modulus $Z+y$ (cm³): : 93.93


Planeo 4090 ()

Secondary moment I_x (cm⁴): : 15.86 kg/m

Secondary moment I_y (cm⁴): : 285.85

Weight: : 10.62 lb/ft | 15.86 kg/m

Section modulus $Z+x$ (cm³): : 14271.67

Section modulus $Z+y$ (cm³): : 100.3

